

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 October 2005 (27.10.2005)


PCT

(10) International Publication Number  
**WO 2005/101599 A1**

- (51) International Patent Classification<sup>7</sup>: H01S 5/183, 5/026, 5/04, 5/343, 5/40 (74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo 150-6032 (JP).
- (21) International Application Number: PCT/JP2005/007269<sup>\*</sup> (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 7 April 2005 (07.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2004-118755 14 April 2004 (14.04.2004) JP
- (71) Applicant (for all designated States except US): RICOH COMPANY, LTD. [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): TAKAHASHI, Takashi [JP/JP]; 24-7-103, Yamadauenodaicho, Taihaku-ku, Sendai-shi, Miyagi, 9820815 (JP).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: VERTICAL CAVITY SURFACE EMITTING SEMICONDUCTOR LASER, LIGHT EMISSION DEVICE, AND OPTICAL TRANSMISSION SYSTEM

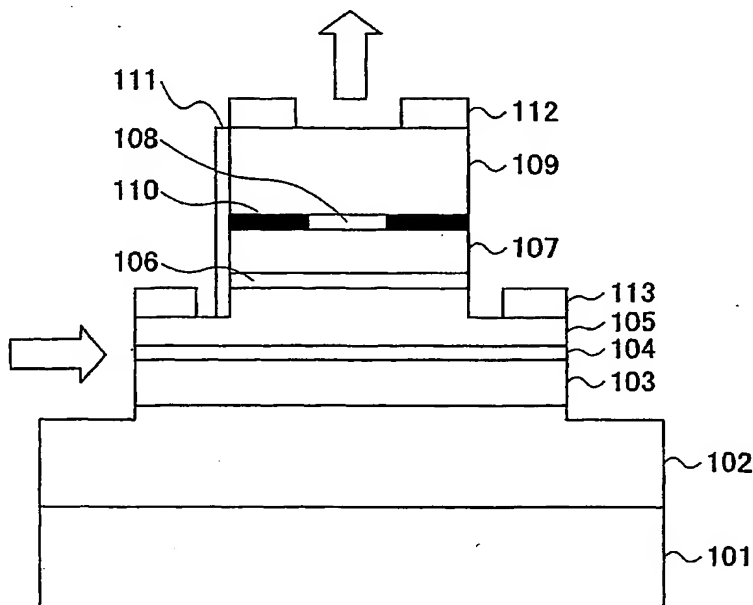

(57) Abstract: A semiconductor laser is disclosed with which a VCSEL can be constituted with a simplified configuration for optical transmission at a transmission rate higher than 10 Gbps. The semiconductor laser includes a resonator including a first active region able to emit light in response to current injection and a second active region able to emit light in response to external excitation light. Multilayer film reflecting mirrors sandwich the resonator from two opposite sides. The first active region and the second active region generate light at a wavelength the same as the resonance mode of the resonator.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*